## LOAN DOCUMENT

	PHOTOGRAPH THIS SHEET	
ar ar		0)
N NUMBE	LEVEL	INVENTORY
DTIC ACCESSION NUMBER	pletion of One-Year Bioventing  DOCUMENT EDENTIFICATION,  24 Feb 95	 H
	DISTRIBUTION STATEMENT A Approved for Public Release Distribution Unlimited	A N D
	DISTRIBUTION STATEMENT	I
ACCESSION FOR  NTIS GRAM U DTIC TRAC UNANNOUNCED JUSTIFICATION  BY  DISTRIBUTION/ AVAILABILITY CODES  DISTRIBUTION AVAILABILITY AND/OR SPECIAL  PLANTAGE OF TRACE OF	DATE ACCES	SIONED CAR
	DATE RET	
20010117		
	IVED IN DTIC REGISTERED OR CERT	IFIED NUMBER
DTIC ROM 70A	HOTOGRAPH THIS SHEET AND RETURN TO DTIC-FDAC  DOCUMENT PROCESSING SHEET PREVIOUS EDIT	TIONS MAY BE USED UNDIT

LOAN DOCUMENT

STOCK IS EXHAUSTED.

	DEFENSE TECHNICAL INFOI REQUEST FOR SCIENTIFIC AND		
Tit	AFCEE Collection		
	The state of the s		· :
1,	Report Availability (Please check one box)	1 3. Abrombag of	
<u> </u>		2a. Number of Copies Forwarded	2b. Forwarding Date
· •	This report is not available. Complete section 3.		10.6
	. Distribution Statement (Please check ONE DOX)	1 each	July/2000
Dal	D Directive 5230.24, "Distribution Statements on Technical Documents, scribed briefly below. Technical documents MUST be assigned a distrib	." 18 Mar 87, contains seve bution statement.	on distribution statements, as
M	DISTRIBUTION STATEMENT A: Approved for public rele	ease. Distribution is	unlimited.
	DISTRIBUTION STATEMENT B: Distribution authorized	to U.S. Government	Agencies only,
	DISTRIBUTION STATEMENT C: Distribution authorized contractors.		<del>-</del>
	DISTRIBUTION STATEMENT D: Distribution authorized DoD contractors only.	to U.S. Department c	of Defense (DoD) and U.S
	DISTRIBUTION STATEMENT E: Distribution authorized components only.	to U.S. Department c	of Defense (DoD)
	DISTRIBUTION STATEMENT F: Further dissemination of indicated below or by higher authority.	only as directed by the	e controlling DoD office
	DISTRIBUTION STATEMENT X: Distribution authorized individuals or enterprises eligible to obtain export-controll Directive 5230.26, Withholding of Unclassified Technical	lled technical data in a	nonerdanne with Dan
2d.	. Reason For the Above Distribution Statement (in accord	dance with DoD Directive :	5230,24)
2e.	Controlling Office	2f Date of Diet	ribution Statement
	_	Determination	
į, .	HQ AFLEE	15 No:	V 2000
	This report is NOT forwarded for the following reasons		
	the state of the s	•	er is
	It will be published at a later date. Enter approximate date	e if known.	17/1/1 1877 (1888) 1872 W MAN (1888 MAN   1888   1888   1888   1888   1888   1888   1888   1888   1888   1888
	In accordance with the provisions of DoD Directive 3200,1 because:	12, the requested doc	ument is not supplied
		**************************************	/#**
•	Annahalalalala	***************************************	**************************************
rin / />	at or Type Name Signat	aire (	
	ephone	Per one use of	
21	10-536-1431	AQ Number	NAL- 13-1930



## DEPARTMENT OF THE AIR FORCE HEADQUARTERS AIR FORCE CENTER FOR ENVIRONMENTAL EXCELLENCE BROOKS AIR FORCE BASE TEXAS

24 Feb 95

MEMORANDUM FOR 341 CES/CEVR

ATTN: Mr. Dan Duff 39 78th Street North

Malmstrom AFB MT 59402-7536

FROM: HQ AFCEE/ERT

8001 Arnold Drive

Brooks AFB TX 78235-5357

SUBJECT: Completion of One-Year Bioventing Test, Bulk POL Storage Area,

and Pumphouse 2

The Air Force Center for Environmental Excellence (AFCEE) one-year bioventing test and evaluation projects at the Bulk POL Storage Area and Pumphouse 2 have been completed. For each site, Figure 1 provides general site information and Table 1 provides a summary of initial, six-month, and one-year fuel biodegradation rates measured at several monitoring points. The one-year biodegradation rates for the POL Storage area are significant due to the amount of fuel residual at this active site. The one-year biodegradation rates at Pumphouse 2 could not be determined because the presence of a high water table prevented the collection of respiration samples. Parsons Engineering Science, our contractor, plans to conduct a respiration test while performing other work associated with our Risk-Based Approach Initiative. Table 2 provides a summary of initial and final soil and soil gas sampling results for total recoverable petroleum hydrocarbons (TRPH) and benzene, toluene, ethylbenzene, and xylenes (BTEX). Based on results from your sites and 123 other sites currently under operation, bioventing is cost-effectively remediating fuel contamination in a reasonable time frame. We recommend its application at other sites on your installation using the criteria in the AFCEE Test Plan and Technical Protocol for a Field Treatability Test for Bioventing, May 1992, including Addendum One, February, 1994. These are found in the "Tool Box" recently sent to your base.

The objective of the one-year sampling effort was not to collect the large number of samples required for statistical significance, but to show relative changes in TRPH and BTEX concentrations. The POL Storage Area soil sampling results indicate a one order of magnitude reduction in BTEX concentrations at MPA-3, MPB-5, and MPC-7. TRPH concentrations significantly decreased at MPA-3 and MPC-7, but increased at MPB-5. An increase in TRPH concentrations at MPB-5 could indicate a leak in the fuel lines adjacent to this monitoring point or soil sampling variability. Soil gas sampling results showed a significant reduction in TVH and BTEX at MPA-3.5, MPB-3.5 and MPC-7.

Pumphouse 2 soil sampling results indicate a one order of magnitude reduction in BTEX and TRPH concentrations at MPA-2, MPB-3.5, and MPC-5.5. Soil gas

And MO/- 03-0.730

sampling results showed an order of magnitude reduction in TVH and BTEX at MPA-4 and MPB-4.

Soil gas samples are similar to composite samples in that they are collected over a wider area. Thus, they provide a good indication of changes in soil gas profiles and volatile contaminant concentrations (see Addendum One to Test Plan and Technical Protocol for a Field Treatability Test for Bioventing - Using Soil Gas Surveys to Determine Bioventing Feasibility and Natural Attenuation Potential, February 1994). Soil samples, on the other hand, are discrete point samples subject to large variabilities over small distances/soil types. Given this variability, coupled with known sampling and analytical variabilities, a large number of samples would have to be collected to conclusively determine "real" changes in soil contamination. Because of the limited number of samples, these results should not be viewed as conclusive indicators of bioventing progress or evidence of the success or failure of this technology. In-situ respiration tests are considered to be better indicators of hydrocarbon remediation than limited soil sampling.

Sampling results indicate that a reduction in TRPH has taken place in the soils within the estimated 25-foot treatment radius of the pilot vent wells at both sites. Due to the inherent variability of in-situ soil samples, TRPH sampling is inclusive at this time, but all other measurements indicate that fuel biodegradation is progressing at a significant rate.

AFCEE recommends that the bioventing pilot system continue to operate at the POL Storage Area until background respiration rates are approached. If additional source removal is required, system expansion to a full-scale bioventing system can be conducted through HQ AFCEE. We also recommend the bioventing pilot systems continue to operate at Pumphouse 2 until the Risk-Based Treatability Study results are known. If full scale source removal is required, system expansion to a full-scale bioventing system can be conducted through the Risk-Based Approach. Please contact Sam Taffinder, AFCEE/ERT, DSN 240-4366, COM 210-536-4366, to discuss the technical details for full-scale expansion.

Data from your base and many others indicate that BTEX compounds are preferentially biodegraded over TPH. Since BTEX compounds represent the most toxic and mobile fuel constituents, a BTEX standard is a risk-based standard. We strongly encourage its use over an arbitrary TPH standard. Within the AFCEE Risk-based Petroleum Hydrocarbon "Tool Box," the reported entitled "Use of Risk-based Standards for Cleanup of Petroleum Contaminated Soil" summarizes the BTEX/TPH issue and will assist you in negotiating for a BTEX cleanup standard. Our information indicates that Montana regulates to BTEX clean-up levels, but this decision is made in conjunction with the results from a risk evaluation on a site-by-site basis. In conclusion, a risk-based approach will expedite site closure while reducing overall costs.

In general, quantitative destruction of BTEX will occur over a one- to two-year bioventing period. Soil gas surveys and respiration tests can be used as BTEX destruction indicators. If a non-risk-based/TPH cleanup is chosen, the pilot and full-

scale systems should be operated until respiration rates approach background rates. We recommend that confirmatory soil sampling be conducted four to six months after background respiration rates are approached.

Because these are streamlined test and evaluation projects, our contract does not provide for additional reports to the base on pilot study results. The interim results report dated Feb 93 contains as-builts and initial data. This letter summarizes all data collected and provides the next step recommendations. AFCEE is no longer responsible for the operation, maintenance, or monitoring of bioventing systems. We are initiating a contract to extend monitoring at some sites beyond the initial one-year test. Monitoring will include soil gas and respiration tests to document hydrocarbon degradation, but may also include the collection of sufficient final soil samples to statistically demonstrate site cleanup. If you are interested, please call us.

The blower and accessories are now base property and should continue to be used on these or other bioventing sites. Although current equipment is explosion proof, under no circumstances should it be used for soil vapor extraction unless appropriate explosion-proof wiring is provided. If the base does not want the keep the blower or if you have further questions, please contact us.

On behalf of the AFCEE/ERT staff, I would like to thank you for your support of these bioventing tests and evaluation projects. The information gained from each site will be invaluable in evaluating this technology and will promote its successful application on other DOD, government, and private sites. I have attached a customer satisfaction survey. Please take a few minutes to fill it out and tell us how we did. We look forward to hearing from you.

ROSS N. MILLER, Lt Col, USAF, BSC Chief, Technology Transfer Division

Attachments:


1. POL Data

2. Pumphouse 2 Data

3. Survey

cc: HQ AFSPC/CEVR

AFCEE/ERD (Mr. McMindes)

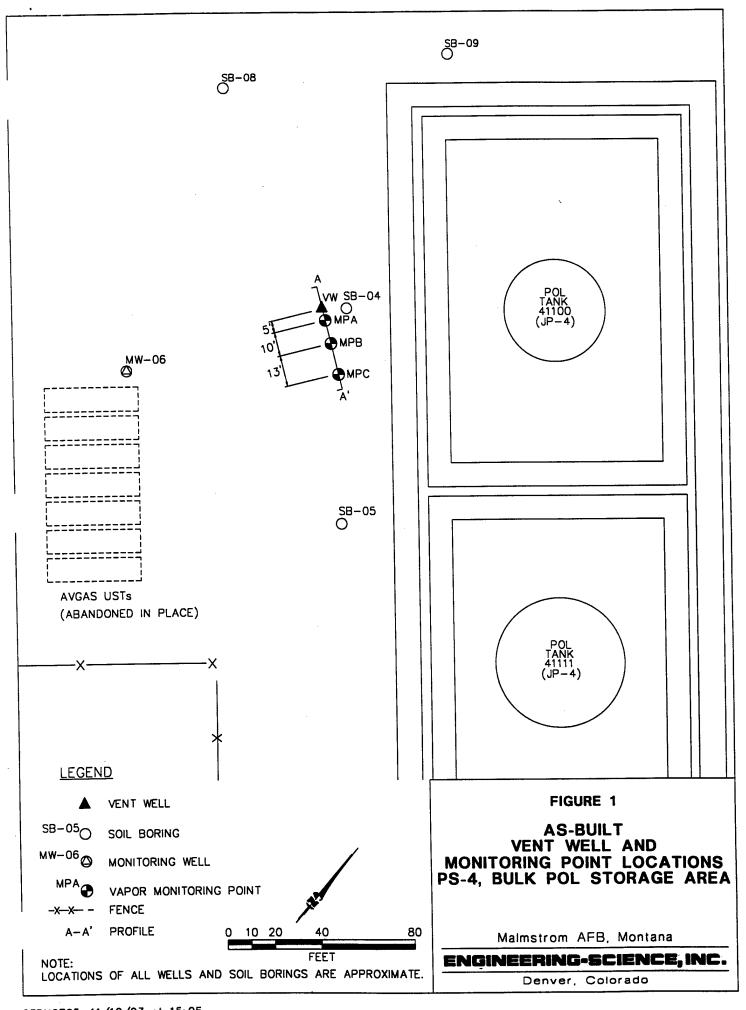

RESPIRATION AND DEGRADATION RATES BULK POL STORAGE AREA MALMSTROM AFB, MT TABLE 1

_		Coil	3011	1 emperature			SN		SN		11 00	11.09	111111
	1-Year	D. Johnson	Degradation		(mg/kg/year)		SN		300		000	067	
		**	, V	(% O <sub>2</sub> /min)			NSe'		0.0042			0.0041	
			Soil	<b>Femperature</b>	( <sub>0</sub> C)		SN		SZ		,	NS	
	6-Month <sup>b</sup> /	IMOTAL	egradation	Rate	ng/kg/year)		190		051	ř		400	
			K <sub>o</sub>	(% O <sub>2</sub> /min)	)		0.0032		A 500 0	0.0074		9900'0	
			Soil	Temperature	$(O_{\mathcal{O}})$		PSN.		9	S		11.56	
		Initial	Degradation	Rate	(mg/kg/year) <sup>a/</sup>	1	420	2		1100		720	
			×	/g/ O. /min) Rate	( ( ( ) ( ) ( ) ( ) ( )		0.01	10.0		0.028		0.018	
					I cotion Denth	L'OCAHOII - Depui		MPA-5.5		MPB-3.5		MDC_3 \$	

<sup>a/</sup> Milligrams of hydrocarbons per kilogram of soil per year.

<sup>b/</sup> Assumes moisture content of the soil is average of initial and final moistures.

c/ NS= Not sampled.

d'An area respiration test was performed by restarting the blower for approximately 47 hours to provide oxygen to soils. e' MPA-3.5 was below the ground water suface at time of 1-year sampling.

BULK POL STORAGE AREA TABLE 2

## INITIAL AND 1-YEAR SOIL AND SOIL GAS ANALYTICAL RESULTS MALMSTROM AFB, MT

		San	nple Loca	Sample Location - Depth		
Analyte (Hnite)a/		(feet	: below gre	(feet below ground surface)	(c)	
Allaryte (Carts)	MPA-3.5		MPB-3.5	-3.5	MPC-3.5	3.5
Soil Gas Hydrocarbons	Initial <sup>b/</sup>	1-Year	Initial	1-Year	Initial	1-Year
TVH (romy)	34,000	/pSN	49,000	1,100	54,000	52
I vII (PPIIIV) Renzene (nnmv)	< 1.1	NS	< 2.8	< 0.018	< 1.8	< 0.12
Tolliene (ppmv)	< 1.1	NS	< 2.8	< 0.018	34	< 0.12
Fithulbenzene (nnmv)	8.6	NS	14	0.590	12	3.500
Xylenes (ppmv)	21	NS	52	1.700	40	6.700
	MPA-3	-3	MPB-5	3-5	MPC-7	-7
Soil Hydrocarbons	Initial <sup>e/</sup>	1-Year <sup>[/</sup>	Initial	1-Year	Initial	1-Year
TR PH (molks)	3640	315	880	2440	3690	694
Renzene (mo/kg)	0.79	< 0.05	< 2.8	1.7	12	0.33
Tolliene (mo/ko)	42	< 0.05	30	15	310	2.1
Fibultenzene (molko)	15	< 0.05	7.2	13	43	2.8
Xylenes (mg/kg)	84	< 0.099	45	99	240	13
Moisture (%)	18	16.3	12	16.6	21	15.2

a/ TVH = total volatile hydrocarbons; ppmv=parts per million, volume per volume;


TRPH=total recoverable petroleum hydrocarbons; mg/kg=milligrams per kilogram.

<sup>&</sup>lt;sup>b/</sup> Initial soil gas samples collected on 10/12/93.

c/ 1-Year soil gas samples collected on 10/19/94.

d/ NS = Not sampled, monitoring point below water surface. e' Initial soil samples collected on 10/11/93.

<sup>1 1 -</sup> Year soil samples collected on 11/9/94.

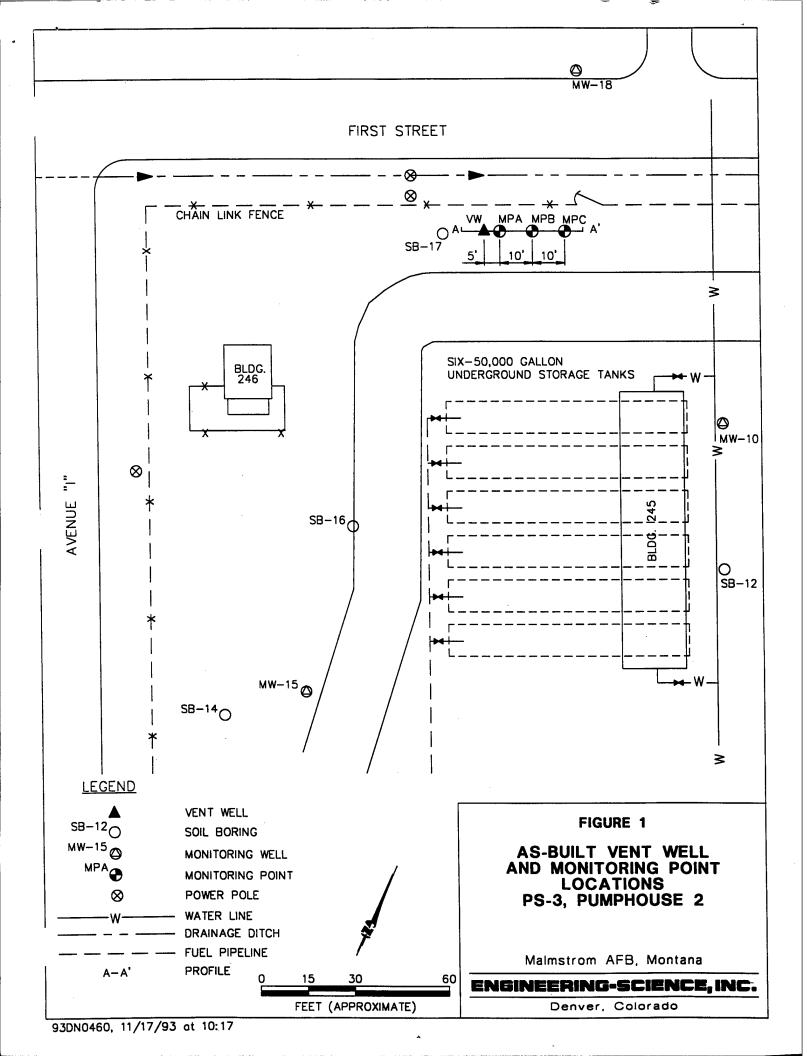

RESPIRATION AND DEGRADATION RATES MALMSTROM AFB, MT TABLE 1 PUMPHOUSE 2

								1 V.22.b	_
		Initial			6-Month			1-rear	
	1	Tr. ' Describer	Coil	7	_	Soil	K,	Degradation	Soil
	4	Degradation	1100	0	-0-1		(11111)	Doto	Temperature
	(0%, O./min)	Rate	Temperature	Temperature $ (\% O_{\gamma}/min) $	Kate	Iemperature	(% O <sub>2</sub> /mm)	Naic	remperature
T Donth	(10 02/111111)	(mo/ko/vear) <sup>a/</sup>	() <sub>0</sub> ()	4	(mg/kg/year)	(၁၀)		(mg/kg/year)	(GC)
Location - Deptin		(ma(8,18,11)	7						
V V V	0.049	2100	16.9	0.0051	220	NS	SN	NS	16.4
MrA-4	750.0								
	1		1001	0 0034	180	SZ	SZ	SN	NS
MPB-4	0.05	7900	SS		201				
			1	0	900	312	SIN	VZ	SZ
MPC-4	0.063	5300	SZ	0.0058	490	CN			

a Milligrams of hydrocarbons per kilogram of soil per year.

b/ The 1 year respiration tests were not performed due to monitoring point flooding. All points were below the ground water surface.

c' NS = Not sampled.

INITIAL AND 1-YEAR SOIL AND SOIL GAS ANALYTICAL RESULTS MALMSTROM AFB, MT PUMPHOUSE 2 TABLE 2

Sample Location-Depth

Acclude (Ilmits)2/		(feet	below gro	(feet below ground surface)	) ( )	
Analyte (Omits)	MPA-4		MPB-4	-4	MPC-4	4
Soil Gas Hydrocarbons	Initial <sup>b/</sup> 1-Year <sup>c/</sup>	ar <sup>c/</sup>	Initial	1-Year	Initial	1-Year
TVH (name)	5.400	pSN	6,900	99	14,000	SN
LVII (Ppinv)		NS	< 0.69	< 0.002	19	SN
Tolliene (ppmv)	< 0.61	NS	< 0.69	< 0.002	< 0.57	SN
Total (pp.m.)	6	NS	5.2	0.150	13	SN
Xylenes (ppmv)	111	NS	8.6	0.280	15	NS
	MPA-2	2	MPB-3.5		MPC-5.5	
Soil Hydrocarbons	Initiale/ 1-Year	$\vdash$	Initial	1-Year	Initial	1-Year
TR PH (mg/kg)	300	146	270	33.5	150	74.4
Benzene (malka)		< 0.05	< 0.64	< 0.05	< 0.31	< 0.05
Toluene (mg/m)		< 0.05	< 0.64	0.12	1.1	0.057
Tolucine (mg/ng) Ethylbenzene (mg/kg)		< 0.05	2.2	0.55	1.5	0.067
Xylenes (mg/kg)		< 0.1	3.1	0.29	4.4	< 0.1
Moisture (%)	23	NAg	22	NA	20	NA

a/ TVH = total volatile hydrocarbons; ppmv=parts per million, volume per volume;

TRPH=total recoverable petroleum hydrocarbons; mg/kg=milligrams per kilogram.

b/ Initial soil gas samples collected on 10/3/93.

d' NS = Not sampled.

e/ Initial soil samples collected on 10/2/93.

f' 1-Year soil samples collected on 10/23/94.

<sup>8/</sup> NA = Not analyzed.